


# 2000 motor (oil-less)

|                             |          |      |      |      |      |      |      |       |       |       |       |       |
|-----------------------------|----------|------|------|------|------|------|------|-------|-------|-------|-------|-------|
| Voltage                     | V        | 100  | 120  | 200  | 200  | 230  | 230  | 3x200 | 3x200 | 3x208 | 3x400 | 3x440 |
| Frequency                   | Hz       | 50   | 60   | 50   | 60   | 50   | 60   | 50    | 60    | 60    | 50    | 60    |
| Motor                       | HP       | 1.5  | 1.5  | 1.5  | 1.5  | 1.5  | 1.5  | 1.5   | 1.5   | 1.5   | 1.5   | 1.5   |
|                             | kW       | 1.1  | 1.1  | 1.1  | 1.1  | 1.1  | 1.1  | 1.1   | 1.1   | 1.1   | 1.1   | 1.1   |
| Displacement                | l/min    | 176  | 212  | 176  | 212  | 176  | 212  | 176   | 212   | 212   | 176   | 212   |
|                             | CFM      | 6.22 | 7.49 | 6.22 | 7.49 | 6.22 | 7.49 | 6.22  | 7.49  | 7.49  | 6.22  | 7.49  |
| FAD @ 8 bar                 | l/min    | 90   | 110  | 90   | 110  | 90   | 110  | 90    | 110   | 110   | 90    | 110   |
|                             | CFM      | 3.18 | 3.88 | 3.18 | 3.88 | 3.18 | 3.88 | 3.18  | 3.88  | 3.88  | 3.18  | 3.88  |
| Max. pressure <sup>1)</sup> | bar      | 8    | 8    | 8    | 8    | 8    | 8    | 8     | 8     | 8     | 8     | 8     |
|                             | psi      | 120  | 120  | 120  | 120  | 120  | 120  | 120   | 120   | 120   | 120   | 120   |
| Max. current                | A        | 16.0 | 16.6 | 8.2  | 8.8  | 8.0  | 8.3  |       |       | 6.4   | 3.6   | 3.6   |
| Tank size                   | litres   | -    | -    | -    | -    | -    | -    | -     | -     | -     | -     | -     |
|                             | gallon   | -    | -    | -    | -    | -    | -    | -     | -     | -     | -     | -     |
| Weight                      | kg       | 29   | 29   | 29   | 29   | 29   | 29   | 29    | 29    | 29    | 29    | 29    |
|                             | lbs      | 64   | 64   | 64   | 64   | 64   | 64   | 64    | 64    | 64    | 64    | 64    |
| Noise level                 | dB(A)/1m | 72   | 74   | 72   | 73   | 72   | 73   | 72    | 73    | 73    | 72    | 73    |
| Thermal protection          |          | Yes  | Yes  | Yes  | Yes  | Yes  | Yes  | Yes   | Yes   | Yes   | Yes   | Yes   |
| Duty cycle                  |          | 100% | 100% | 100% | 100% | 100% | 100% | 100%  | 100%  | 100%  | 100%  | 100%  |

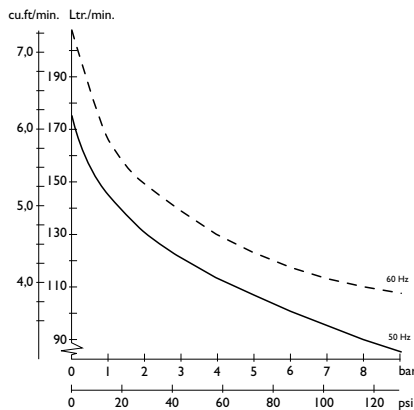

Dimensions (l x w x h)  
455 x 340 x 310 mm / 17 7/8 x 13 3/8 x 12 2/8 inch

<sup>1)</sup> Higher pressure available upon request hence increased max. current

Technical modifications reserved



**JUN-AIR**®

E-mail: [info@jun-air.dk](mailto:info@jun-air.dk)  
Internet: [www.jun-air.com](http://www.jun-air.com)