


OF302-4S (oil-less)

| | | | | | | | | | | | | | |
|--------------------|----------|------|-------------------|-------------------|--|--|--|--|--|--|--|--|--|
| Voltage | V | 120 | 230 | 230 | | | | | | | | | |
| Frequency | Hz | 60 | 50 | 60 | | | | | | | | | |
| Motor | HP | 0.60 | 0.60 | 0.60 | | | | | | | | | |
| | kW | 0.44 | 0.44 | 0.44 | | | | | | | | | |
| Displacement | l/min | 138 | 108 | 138 | | | | | | | | | |
| | CFM | 4.87 | 3.81 | 4.87 | | | | | | | | | |
| FAD @ 8 bar | l/min | 44 | 38 | 44 | | | | | | | | | |
| | CFM | 1.55 | 1.34 | 1.55 | | | | | | | | | |
| Max. pressure | bar | 8 | 8 ¹⁾ | 8 ¹⁾ | | | | | | | | | |
| | psi | 120 | 120 ¹⁾ | 120 ¹⁾ | | | | | | | | | |
| Max. current | A | 7.5 | 3.4 | 4.1 | | | | | | | | | |
| Tank size | litres | 4 | 4 | 4 | | | | | | | | | |
| | gallon | 1.1 | 1.1 | 1.1 | | | | | | | | | |
| Weight | kg | 44 | 44 | 44 | | | | | | | | | |
| | lbs | 97 | 97 | 97 | | | | | | | | | |
| Noise level | dB(A)/1m | 61 | 61 | 61 | | | | | | | | | |
| Thermal protection | | Yes | Yes | Yes | | | | | | | | | |
| Duty cycle | | 100% | 100% | 100% | | | | | | | | | |

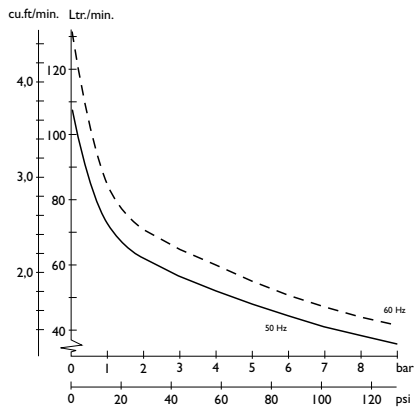

Dimensions (l x w x h)
252 x 614 x 617 mm / 9 7/8 x 24 1/8 x 24 2/8 inch

¹⁾ Available for operation at a maximum pressure of 10 bar / 145 psi upon request. Please note that operation at higher pressure will influence the lifetime.

Technical modifications reserved

JUN-AIR 

IDEX
IDEX CORPORATION

E-mail: info@jun-air.dk
Internet: www.jun-air.com

